

01/10/00



jc688 U.S. PTO



GEA Legal

George L. Rideout, Jr.  
Counsel-Intellectual Property

General Electric Company  
Appliance Park, 2-225  
Louisville, KY 40225  
502 452-7792  
Fax 502 452-0395

December 30, 1999

jc598 U.S. PTO

09/480588



Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Re: Docket No. 9D-HR-19163 - Fulks

Sir:

Herewith I hand you specification and drawings, 2 sheets, for an application for Letters Patent upon an improvement in:

REFLECTIVE BRACKET

the invention of: Robert L. Fulks

|  |           |
|--|-----------|
| Basic Fee  | \$ 760.00 |
| Additional Fees:                                   |           |
| Multiple dependent claims (\$260)                  | 0         |
| Total number of claims in excess of 20, times \$18 | \$ 0.00   |
| Number of independent claims minus 3, times \$78   | \$ 0.00   |
| Total Filing Fee                                   | \$ 760.00 |
| Assignment Fee                                     | 40.00     |
| TOTAL  | \$ 800.00 |

Enclosed is a check for \$800.00 to cover the fees listed above. The Commissioner is hereby authorized to charge any additional filing fees which may be required, or credit any over-payment, to Account No. 07-0844. This does not authorize charging any subsequent fees to the Deposit Account.

Respectfully,

*George L. Rideout, Jr.*

George L. Rideout, Jr.  
Counsel  
GE Appliances, AP2-225

Enclosures

## REFLECTIVE BRACKET

### BACKGROUND OF THE INVENTION

This invention relates generally to reflective brackets and, more particularly, to a reflective bracket for a radiant heat defrost heater for a refrigerator.

Most refrigerators, as disclosed in U.S. Patent No. 5,711,159, include an evaporator which normally operates at sub-freezing temperatures in an evaporator compartment positioned behind the freezer department. Consequently, a layer of frost typically builds up on the surface of the evaporator. As disclosed in U.S. Patent No. 5,042,267, a radiant heater is often positioned inside a housing and below the evaporator to warm the evaporator by both convection and radiant heating in order to quickly defrost the evaporator.

A number of problems have been noted, however, with known radiant heat refrigerator defrosters. For example, radiant heaters typically operate at temperatures above the boiling point of water, and if water is allowed to impinge on the heating element during the defrost process, undesirable noises will occur. In addition, the housing surrounding the radiant heater tends to heat the radiant heater, causing the heater to operate at higher temperatures and reducing the life of the heater. Further, the increased temperature of the heater tends to create abnormal convection currents across the evaporator during defrost cycles, and undesirable pressure drops across the evaporator compartment. Still further, indirect radiant heating provided by the housing surrounding the heater tends to increase the required time for a complete defrost, and reduces defrost efficiency.

Accordingly, it would be desirable to mount a radiant defrost heater in a manner that protects the heating element from defrost water, improves convection flow in the evaporator compartment and decreases the required defrost time.

## BRIEF SUMMARY OF THE INVENTION

In an exemplary embodiment of the invention, a reflective bracket for a refrigerator defroster includes a channel fabricated from a material of high emissivity, or tendency to reflect heat, and at least one ventilation opening through the channel to allow for direct line-of-sight heating of components, to improve convection flow, and to reduce the pressure drop across the evaporator compartment.

More specifically, the channel is parabolically shaped and has a longitudinal axis. At least one opening extends longitudinally at substantially the bottom of the parabolic shaped channel, and a plurality of ventilation openings extend laterally along the sides of the channel on both sides of the longitudinally extending opening. The ventilation openings allow for direct heating of components, such as a drain pan, for a more effective defrost operation. The ventilation openings reduce the amount of heat reflected back to the heater element and allow the radiant heater to operate at a reduced temperature, thereby extending the life of the heater. Further, the ventilation openings improve air flow and pressure balance within the evaporator compartment.

Additionally, an integrally formed shield protects the radiant heater from falling moisture, and integrally formed holding brackets hold a radiant heater in position relative to the channel. Thus, a convenient and durable reflective bracket for a radiant defrost heater is provided that increases defrost efficiency and reduces required defrost time. Due to the increased efficiency afforded by the reflective bracket, a lower powered heater may be used and still achieve comparable defrost performance as higher powered heaters in conventional housings.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a reflective bracket;

Figure 2 is a flat panel view of the bracket shown in Figure 1; and

Figure 3 is a top plan view of the bracket shown in Figure 1 attached to a radiant heater element.

#### DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a perspective view of a reflective bracket 10 for a radiant defroster (not shown) for a refrigerator (not shown) including a channel 12, holding brackets 14, a shield 16, and a flap 18.

Channel 12 is made of a lightweight material with a high emissivity, or tendency to reflect radiant energy, such as extruded aluminum. Alternatively, or in combination with high emissivity materials, channel 12 can be finished to improve the reflectivity of channel 12, such as by providing a polished, mirror-like channel surface 20. Channel 12 is substantially parabolic in shape and has a first side 22 and second side 24 extending along a longitudinal axis 26 and forming channel surface 20. A longitudinal ventilation opening 28 extends through channel 12 substantially at a bottom 30 of parabolic channel surface 20 on a first end 32 and second end 34 of channel 12 and substantially separates the first and second channel sides 22 and 24. A plurality of laterally extending ventilation openings 36 extend along first and second sides 22 and 24. Longitudinally extending openings 28 are separated from laterally extending openings 36 along channel surface 20, and laterally extending openings 36 are generally aligned in rows on opposite channel sides 22 and 24.

Holding brackets 14 extend from a first end 32 and a second end 34 of channel 12 and include a cantilever extension 38 extending from bottom 30 of channel surface 20 and partially defining longitudinally extending openings 28 on each end 32, 34 of channel 12. A holding bracket base 40 extends from said cantilever extension 38, and upwardly turned fingers 42 extend from base 40. Base

40 and fingers 42 are dimensioned and positioned relative to one another to support a radiant heating element (not shown in Figure 1) between holding brackets 14 and within channel 12.

Shield 16 extends from channel first side 22 on each end 32, 34 of channel 12 and covers a center portion of channel 12 substantially over longitudinally extending ventilation openings 28. An upwardly turned mounting interface 44 on either side of shield 16 includes a mounting opening 46 for installation purposes. A rectangular flap 18, or cutout, from shield 16 extends from a top 48 of channel first side 22.

Figure 2 is a flat panel view of reflective bracket 10 before it is formed into the shape shown in Figure 1. Channel first side 22 and second side 24 are substantially separated by longitudinal ventilation openings 28 extending along longitudinal axis 26 between channel first end 32 and channel second end 34. A plurality of laterally extending ventilation openings 36 extend along channel first and second sides 22 and 24, and are generally aligned in rows on opposite channel sides 22 and 24 on either side of longitudinally extending openings 28. Holding brackets 14 extend from channel first end 32 and channel second end 34 and include cantilever extensions 38 extending along longitudinal axis 26. Holding bracket bases 40 extend laterally from said cantilever extension 38, and fingers 42 extend longitudinally from bases 40 toward laterally extending openings 36.

Shield 16 extends from channel first side 22 between each channel end 32, 34. Mounting interfaces 44 on either side of shield 16 include mounting holes 46. A rectangular flap 18, or cutout, from shield 16 extends from a top 48 of channel first side 22 parallel to shield 16.

The flat panel of Figure 2 is appropriately bent and folded into the shape of Figure 1. Specifically, first and second sides 22 and 24 are bent into a parabolic shape to form channel 12 (Figure 1). Shield 16 is folded across top 48 of first

channel side 22 to cover center portion of channel 12 between channel sides 22 and 24. Mounting interfaces 44 are folded upward at each end of shield 16. Finally, holding brackets 14 are bent upwardly to hold a radiant heater element (not shown).

Figure 3 illustrates reflective bracket 10 connected to a radiant heater element 52 (shown in phantom). Shield 16 substantially covers heater element 52 and prevents falling ice or water from hitting heater element 52 and creating thermal transients and unpleasant noises. Longitudinally extending apertures 28 provide ventilation underneath heater element 52 and substantially prevent heat from being reflected from bottom 30 of parabolic channel 12 to heater element 52 and substantially raising the operating temperature of heater element 52. Longitudinally extending openings 28 underneath heater element 52 also improve natural convection heating of the evaporator (not shown) during the defrost cycle.

Laterally extending ventilation openings 36 along channel sides 22, 24 allow direct line-of-sight heating of desired defrost cycle components, such as a drain pan (not shown), to increase defrost cycle efficiency. Convection currents are further improved by laterally extending ventilation openings 36. Reflective, parabolic channel surface 20 between laterally extending openings 36 redirects radiant heat from radiant heater element 52 elsewhere throughout the compartment. Therefore, the total power output of the defrost system is reduced due to more efficient use of heat from radiant heater element 52. Increased defrost efficiency due to the reflectivity of reflective bracket 10 allows a lower power radiant heater to be used and still maintain a performance level comparable to conventional defrost systems using higher powered heaters.

As a result of ventilation openings 28, 36, less heat is reflected back to heater element 52 so heater element 52 burns cooler. Consequently the life of heater element 52 is extended. The lower operating temperature of heating element

52 has a further benefit of reducing air-pressure drop across the evaporator compartment during forced airflow cooling of the evaporator compartment.

While the invention has been described in terms of various specific embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the claims.

5

## CLAIMS:

1. A reflective bracket comprising:  
  
a channel comprising a reflective material, a longitudinal axis, and at least one ventilation opening therethrough.
2. A reflective bracket in accordance with Claim 1 wherein said channel has  
5 a parabolic shape.
3. A reflective bracket in accordance with Claim 1 wherein said at least one ventilation opening extends longitudinally along said channel.
4. A reflective bracket in accordance with Claim 3 further comprising a shield positioned over said at least one ventilation opening.
- 10 5. A reflective bracket in accordance with Claim 4 wherein said shield is integral with said channel.
6. A reflective bracket in accordance with Claim 1 wherein said channel comprises a first side and a second side, said at least one ventilation opening extending laterally along said sides of said channel.
- 15 7. A reflective bracket in accordance with Claim 6 further comprising a flap extending from one of said first side and said second side.
8. A reflective bracket in accordance with Claim 1 further comprising at least one holding bracket extending from an end of said channel.
9. A reflective bracket in accordance with Claim 8 wherein said at least one  
20 holding bracket is integrally formed with said channel.
10. A reflective bracket comprising:



a channel comprising a reflective material, a longitudinal axis, and at least a first ventilation opening and a second ventilation opening therethrough, said first ventilation opening and said second ventilation opening extending obliquely to one another.

5           11. A reflective bracket in accordance with Claim 10 wherein the channel comprises a first side and a second side, said first ventilation opening extending longitudinally along said channel, and said second ventilation opening extending laterally along the sides of said channel.

10           12. A reflective bracket in accordance with Claim 11 further comprising a third ventilation opening extending laterally along said sides of said channel, said at least first ventilation opening positioned between said second ventilation opening and said third ventilation opening.

13. A reflective bracket in accordance with Claim 11 further comprising a shield over said first ventilation opening.

15           14. A reflective bracket in accordance with Claim 13 wherein said shield is integrally formed with said channel.

15. A reflective bracket in accordance with Claim 10 further comprising at least one holding bracket extending from said channel.

20           16. A reflective bracket in accordance with Claim 15 wherein said holding bracket comprises a plurality of fingers.

17. A reflective bracket in accordance with Claim 15 wherein said holding bracket is integrally formed with said channel.

## ABSTRACT OF THE DISCLOSURE

5

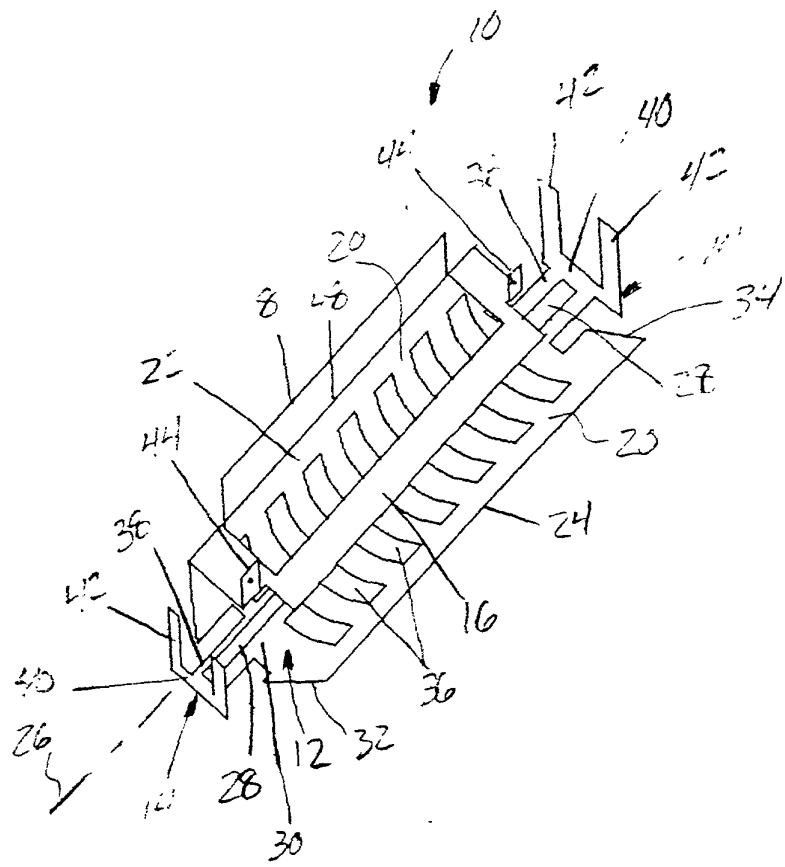


FIG. 1

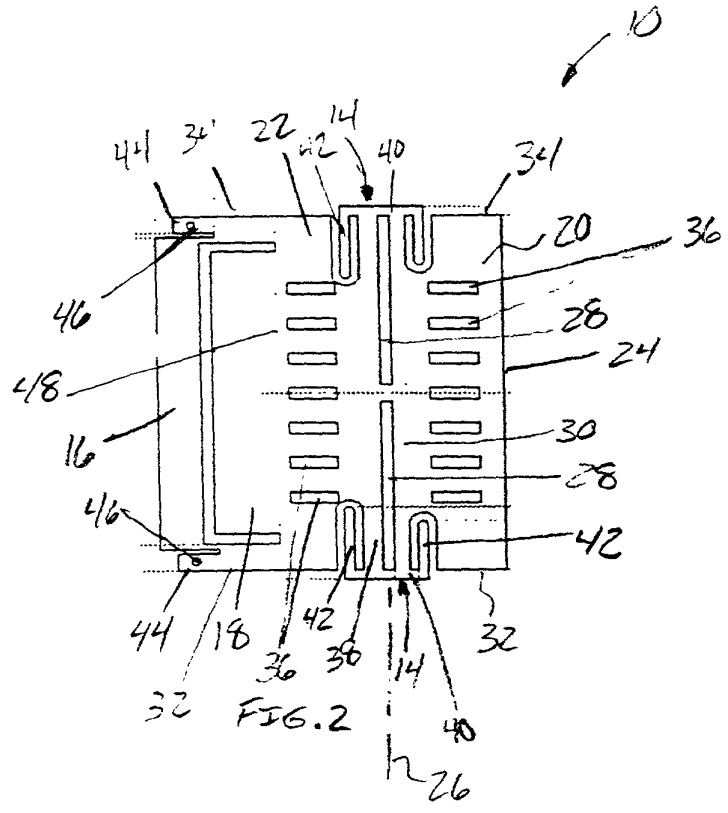


FIG. 2



COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Reflective Bracket, the specification of which:

(check ☒ is attached hereto.

one) was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby appoint H. Neil Houser, Reg. No. 28,859, Legal Operation, Appliance Park 2-225, Louisville, KY 40225; and George L. Rideout, Jr., Reg. No. 43,880, Legal Operation, Appliance Park 2-225, Louisville, KY 40225, and H.J. Policinski, Reg. No. 26,621, General Electric Company, 3135 Easton Turnpike, Bldg. W3D, Fairfield, CT 06431-0001, jointly, and each of them severally, my attorneys and attorney, with full power of substitution, delegation and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent and to transact all business in the Patent and Trademark Office connected therewith. I hereby direct that all correspondence and telephone calls in connection with this application be addressed to the said H. Neil Houser, General Electric Company, at Appliance Park 2-225, Louisville, Kentucky 40225; (502) 452-4653  
(mailing address) (Telephone No.)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Robert Leonard Fulks

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence Ellettsville, Indiana

Citizenship United States

Post Office Address 775 Lantern Lane, Ellettsville, Indiana 47429